


SOLARFLEX™ 400i PACKAGE

SOLAR FLEX

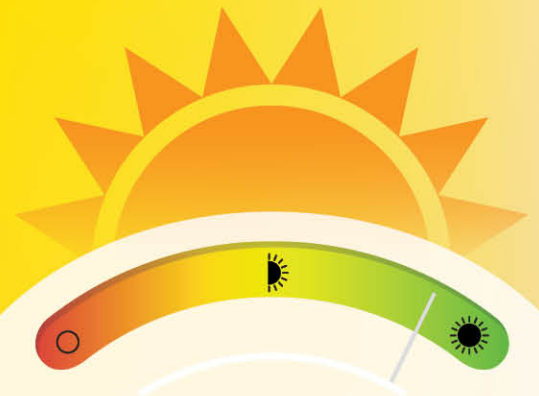

In partnership with  FUTURE SOLUTIONS

MECHANICAL PARAMETERS (EACH PANEL)

Dimensions	40.34"H x 39.37"W x 1.38"D
Weight	26.45lbs
Cell Size (Mono)	3.8" x 6.3"
Cell Qty	60 (6 x 10)
Junction Box	IP65 x/ Bypass Diodes
Solar Cable	35.43"L
Connectors	MC4
Encapsulate	EVA
Back Cover	Composite Sheet (White)
Frame	Anodized Aluminum Alloy

PANEL SPECS	EACH	SYSTEM TOTAL
Pmax/W	200	400
Vmp/V	32.34	
Imp/A	6.18	12.36
Voc/V	40.12	
Isc/A	6.55	13.1



SOLARFLEX 400i (SF400i) INCLUDES:

- 2, 30A solar roof ports w/ MC4 connectors & 10 AWG MPPT solar charging circuits
- 2, Future Solutions 200-watt solar panels & CS2 splitters
- 30A Victron SmartSolar MPPT charge controller w/Bluetooth app
- 2000-watt inverter w/ built-in transfer switch (up to 7 inverted outlets) 2nd inverted prep loop ran for AC
- Zamp Solar portable solar charge port
- Victron SmartShunt battery monitor w/Bluetooth app

Batteries not included



KEYSTONE
RV COMPANY

*V1.0 Aug-21 Information accurate at the time of printing. Features and equipment subject to change without notice.