

## 40" BUILT-IN ELECTRIC **FIREPLACE**

FF40SW15A-BL





UNIMOTE











SLIDE-OUT TEMPERATURE SAFETY CUT-OFF CONTROL SETTINGS



HEAT UP TO 500sq.ft




FLAME TECHNOLOGY





- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control

- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included

# FF40SW15A-BL 40" BUILT-IN ELECTRIC FIREPLACE



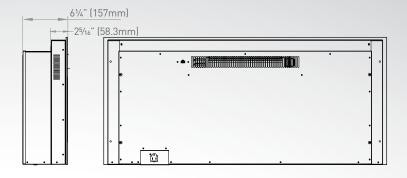



### Specifications

AC 120V/60Hz
750W/1500W
$\sqrt{}$
$\sqrt{}$
$\sqrt{}$
IR

#### **Dimensions**

Product Size (W x H x D)	39 <sup>7</sup> / <sub>16</sub> " x 17 <sup>15</sup> / <sub>16</sub> " x 6 <sup>1</sup> / <sub>4</sub> "
Trouder Size (W X TI X D)	07710 X 17 710 X 074
	(1001 x 450 x 157.5mm)
Packaging Information	

Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	49 <sup>13</sup> / <sub>16</sub> " x 19 <sup>1</sup> / <sub>2</sub> " x 8"
	(1045 x 495 x 202 mm)
Individual Packaging Gross Weight (kg/lbs)	22 / 48.5
Individual Packaging Net Weight (kg/lbs)	20 / 44.1

#### Container Load Information

40'HQ Container Load (pcs)	615