



DIRT DEVIL®

LIMITED WARRANTY

Your Dirt Devil® which has been manufactured and inspected in accordance with carefully specified standards is guaranteed to be free from defects in material and workmanship for two years.

This warranty is, however, subject to the following qualifications, conditions and limitations which are set forth to provide you and all users of Dirt Devil® products with information concerning the duration, extent, availability and applicability of this Dirt Devil® Limited Warranty. The procedure to be taken to obtain its performance and other information concerning the Dirt Devil® warranty policy.

DURATION OF WARRANTY AND TO WHOM EXTENDED

We, H-P Products, Inc., warrants to the customer, the Dirt Devil® equipment and accessories manufactured or supplied by H-P Products, Inc. to be free from defects in material and workmanship under normal intermittent use and when properly installed and operated, for a period of two years from the date of purchase by the first consumer purchaser.

EXCEPTIONS AND LIMITATIONS ON WARRANTY

Defects, malfunctions, failure or damage caused by improper, unreasonable or negligent use or repair while the warranted parts are in the possession of the consumer are excluded from the warranty. The warranty does not cover unauthorized repair of the motor assembly.

IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED TO A PERIOD OF TWO (2) YEARS FROM THE DATE OF PURCHASE BY THE ORIGINAL CONSUMER.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may be void where prohibited.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER EXPRESS WARRANTIES AND DOES NOT COVER THE INSTALLATION OF EQUIPMENT. IN NO EVENT SHALL H-P PRODUCTS, INC. BE LIABLE FOR ANY OTHER OBLIGATIONS OR LIABILITIES, ESPECIALLY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES TO ANYONE.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may be void where prohibited.

WE NEITHER ASSUME NOR AUTHORIZE ANY PERSON TO ASSUME FOR US ANY LIABILITY IN CONNECTION WITH THE SALE OR SERVICE OF THIS Dirt Devil® EQUIPMENT OTHER THAN HEREIN ABOVE PROVIDED.

PROCEDURE TO BE TAKEN TO OBTAIN PERFORMANCE OF WARRANTY

To secure repair of any warranted parts under this warranty, the following procedure should be taken:

The warranted parts, together with satisfactory evidence of the purchase date, must be delivered, with shipping and delivery charges prepaid, to one of the following: (1) the Distributor/Dealer from whom purchased; or (2) H-P Products, Inc., 512 West Gorgas Street, Louisville, Ohio 44641.

Upon compliance with the above procedure H-P Products, Inc. will repair or replace, at its option, any warranted part which is defective. Such part or parts will be furnished without cost F.O.B. place of shipment. Return shipment will be made freight collect. All costs for service calls shall be borne by the one requesting service.

H-P Products
512 West Gorgas Street
Louisville, OH 44641
330-875-5556

Dirt Devil® branded vacuums are manufactured by H-P Products under exclusive license from

OWNER'S MANUAL

for your new



HIGH PERFORMANCE CENTRAL CLEANING SYSTEM

READ MANUAL BEFORE OPERATING SYSTEM

TO THE OWNER:

Read the owner's manual thoroughly to ensure the most efficient use of your Dirt Devil® system.

**THIS APPLIANCE IS FOR RV, BOATS
OR HOUSEHOLD USE.**

**Please be sure this manual/installation
information is left with the power unit or
customer when installation is completed.**

PARTS LIST

492R Support

7455 Gasket

7454 Inlet

5531 Reducer

495S Mounting Plate

457R-G Worn (2 req)

1141-G Crank Tool

7055-01 (Black)


492R Plate

Hose Assembly

Optimality
/ Test

- | PART NO. | DESCRIPTION | RETAIL | PART NO. | DESCRIPTION | RETAIL |
|----------|-------------------------|--------|----------|---------------------------------------|--------|
| 7767 | Paper Bag (3pk.) | 6.95 | 7464 | Inlet Connector | 1.39 |
| 7757 | Canister w/plate | 44.75 | 7455 | Inlet Gasket | .39 |
| 7759 | Top Cover Assembly | 10.95 | 7655-01 | Screws - Black (x4) | 25 ea |
| | *7764 Label | 4.50 | 5531 | Inlet Rectixis | .79 |
| 7768 | L-Mounting Bracket (x2) | 1.99 | 4941 | Inlet - Brown | 11.60 |
| 7760 | Motor Bracket | 4.75 | 4940 | Inlet - Ivory | 11.60 |
| 7762 | Manual | 1.95 | 4935 | Inlet - White | 11.60 |
| 7756-01 | Motor / Blower | 65.97 | 4865 | Mounting Plate | 1.95 |
| 7758 | Motor Gasket | 9.00 | 6678 | Bottom Cover | 9.85 |
| 7090 | Relay Assembly | 63.94 | 7064-02 | Screws (x3) | 14 ea |
| 4934 | Filter Support w/hoile | 1.97 | 6970 | RugBat Turbine Power Brush (optional) | 46.65 |
| 4928 | Filter Support | 1.97 | | Rug Tool | 11.75 |
| 4929 | Filter | .75 | 4982-G | Upholstery Tool | 2.36 |
| 2478-03 | Bushing (Power Cord) | 25 | 7029-G | Crevicle Tool | 1.78 |
| 7590-01 | Bushing (24V) | 25 | 1141-G | | |

7770	Bolt (x2)	.20 ea	4978-G	1 Pc. Plastic Wand (2 req.)
7771	Washer - Nylon (x2)	.04 ea		*Sub Assembly Part
7769	Nut (x2)	.40 ea		

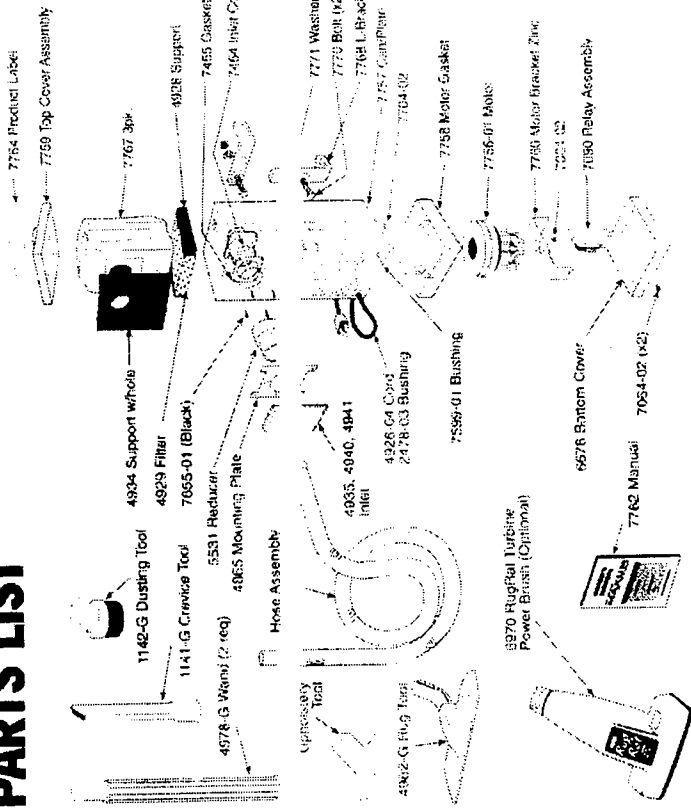




REPLACEMENT PARTS & PRICE LIST

PART NO.	DESCRIPTION	RETAIL	PART NO.	DESCRIPTION	RETAIL
7767	Paper Bag (3pk.)	6.95	7464	Inlet Connector	1.39
7757	Canister w/plate	44.75	7455	Inlet Gasket	.39
7759	Top Cover Assembly	10.95	7655-01	Screws - Black (x4)	25 ea
	*7764 Label	4.50	5531	Inlet Reducers	.79
7768	L-Mounting Bracket (x2)	1.99	4941	Inlet - Brown	11.60
7760	Motor Bracket	4.75	4940	Inlet - Ivory	11.60
7762	Manual	1.95	4935	Inlet - White	11.60
7756-01	Motor / Blower	85.97	4865	Mounting Plate	1.95
7758	Motor Gasket	9.00	6678	Bottom Cover	9.85
7080	Relay Assembly	63.94	7064-02	Screws (x3)	14 ea
4934	Filter Support w/holet	1.97	6970	RugBat Turbine Power Brush (optional)	46.65
4928	Filter Support	1.97			
4929	Filter	.75	4962-G	Rug Tool	11.75
2478-03	Bushing (Power Cord)	.25	7029-G	Upholstery Tool	2.36
7599-01	Bushing (24V)	.25	1141-G	Crevice Tool	1.78
4926-04	Power Cord	4.73	1142-G	Dusting Tool	3.55
7770	Bolt (x2)	.20 ea	4978-G	1 Pc. Plastic Wand (2 req.)	3.25 ea
7771	Washer - Nylon (x2)	.04 ea		*Sub Assembly Part	
77769	Nut (x2)	.40 ea			

INSTALLATION INSTRUCTIONS continued...

opening, 97/8" (251mm) above the floor (Fig C) for upright canister position or 13/4" (45mm) above floor for horizontal canister position (see fig D).

4. Do not vent into a wall, ceiling or concealed space of a building or structure. Unit must be vented with interior vent or equivalent (see fig. E).
5. Place the Dirt Devil® canister in its approximate location before installing inlet valve (4940), mounting plate (4865), and inlet reducer (5531) (see fig. E).
6. Inlet valve switch should be wired at this point for convenience (See Figure E). Insert pre-stripped ends of 18-2 (1.00 mm) low voltage wire into holes on back of inlet valve (4940), press in firmly and wires will lock automatically. Pull lightly to test for locking. Connect other ends of wire from inlet valve to wire leads from relay (7090) with wire nuts provided.
7. Install inlet reducer (5531) to inlet connector (7464), glue if needed. Assemble inlet valve to wall with mounting plate (4865) using the four screws provided (see Figure E). Also, tabs on mounting plate should face away from inlet valve.
8. Secure unit to floor and or wall with mounting bracket(s) (7768) provided. Place square heads of mounting bolt in "C" channel of canister. Tighten nut to hold bracket(s) in desired location. Anchor leg of bracket to floor/wall with wood screws provided.
9. Plug in power cord from motor unit to nearby electrical receptacle. Route power supply cord so that it doesn't rest against sharp edges or pinch points. The Dirt Devil® unit operates when the inlet valve lid is lifted.

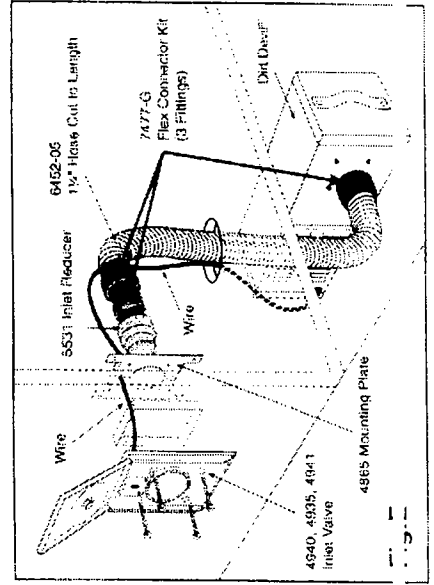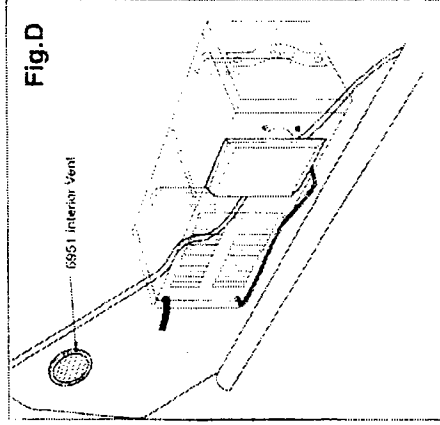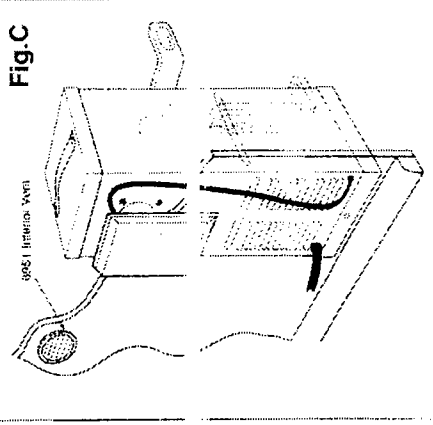

IMPORTANTES MESURES DE SECURITÉ

LISEZ COMPLÈTEMENT LE MODE D'EMPLOI AVANT D'UTILISER CE SYSTÈME D'ASPIRATEUR

En employant un appareil électrique, des précautions fondamentales devraient toujours être prises, y compris:

AVERTISSEMENT

Pour réduire les dangers de feu, d'électrocution, ou de blessure:

- Débrancher et couper le courant avant de le réparer.
- Danger d'électrocution si utilisé sur des surfaces mouillées.
- Ne pas utiliser comme jouet et sur tout faire attention quand on l'emploie près des enfants.
- Employer seulement tel que décrit dans ce manuel d'emploi et qu'avec les accessoires du fabricant.
- Ne pas utiliser si la corde ou la prise électrique est endommagée. Si l'appareil ne fonctionne pas, est endommagé, est tombé par terre, a été laissé à l'extérieur, ou a été immergé, veuillez rapporter l'appareil à un centre de service.
- Ne pas tirer sur le cordon électrique.
- Ne pas utiliser le cordon électrique comme poignée, ni le coincer dans une porte ou l'appuyer sur des coins et boudures tranchants. Ne pas passer l'aspirateur sur le cordon électrique. Éloigner le cordon électrique de la chaleur.
- Ne pas débrancher en tirant sur le cordon électrique. Pour le débrancher, saisir la prise de courant, et non le cordon électrique.
- Ne pas utiliser avec les mains mouillées.
- Ne rien mettre dans les fentes et les orifices bouchés. Ne pas employer

- avec des orifices bouchés. Éliminer poussière, cheveux et les autres choses qui peuvent rendre difficile la circulation d'air.
- Gardez cheveux, vêtements amples, doigts, et toutes autres parties du corps loin des orifices et des pièces mobiles.
- Ne pas faire fonctionner l'appareil sans sac et/ou sans filtre.
- Ne pas aspirer quelque chose qui brûle ou fume, comme des cigarettes, des allumettes, ou des cendres chaudes.
- Brancher à une prise de courant munie d'une mise à la terre. Voir les renseignements de mise à la terre.
- Éteindre tous les contrôles avant de débrancher.
- Faire bien attention en nettoyant les escaliers.
- Ne pas employer pour aspirer des liquides inflammables comme l'essence et ne pas employer dans des endroits où ces choses peuvent se trouver.
- Pour réduire les risques de choc électrique, ne pas aspirer de matières humides.
- Pour éviter d'être blessé par les pièces en mouvement, débrancher avant l'entretien.

CONSERVEZ CES INSTRUCTIONS

POUR USAGE DOMESTIQUE OU POUR VEHICULES DE RECREATION.

**Connect to a properly grounded outlet only.
Ne brancher l'appareil qu'à une prise avec mise à la terre.**

GROUNDING INSTRUCTIONS

This appliance must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This appliance is equipped with a cord having an equipment grounding conductor and grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.


WARNING

Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or service person if you are in doubt as to whether the outlet is properly grounded. Do not modify the plug provided with the appliance - if it will not fit the outlet, have a proper outlet installed by a qualified electrician.

The Model Dirt Devil® appliance is for use on a nominal 120 volt circuit and has a grounding plug that looks like the plug illustrated in Fig. A.

Make sure that the appliance is connected to an outlet having the same configuration as the plug. No adapter should be used with this appliance.

FIG. A / MODÈLE A



GROUNDING METHOD
MÉTHODE DE MISE À LA TERRE

INSTRUCTIONS DE MISE À LA TERRE

Cet appareil doit avoir une mise à la terre. Si une défaillance ou un autre événement, la mise à la terre offre une voie de moindre résistance au courant électrique, d'où un risque moins élevé d'électrocution. Cet appareil est équipé d'un cordon électrique ayant un conducteur et une fiche de mise à la terre. Cette fiche doit être branchée dans une prise appropriée qui a été installée et mise à la terre convenablement en accord avec le code électrique de votre région.

AVERTISSEMENT

Un branchement incorrect de l'équipement de mise à la terre peut causer un risque d'électrocution. Si vous avez un doute concernant la mise à la terre de votre prise, veuillez faire vérifier votre installation par un électricien qualifié ou une personne du service après-vente. Ne pas modifier la fiche fournie avec l'appareil - si la fiche ne se branche pas à la prise, faites installer une prise adéquate par un électricien qualifié.

L'appareil, modèle Dirt Devil® doit être employé avec un circuit de 120 volts et avoir une prise qui ressemble à la prise illustrée sur l'image A.

Vérifiez que votre appareil est branché sur une prise ayant la même configuration que la fiche électrique. Aucun adaptateur ne devrait être utilisé avec cet appareil.

WARNING:
ELECTRIC SHOCK
COULD OCCUR IF
USED ON WET
SURFACES.

CAUTION:
DO NOT USE ON
WET RUG OR
FLOOR.

ATTENTION:
NE PAS UTILISER
SUR TAPIS OU
PLANCHER
MOUILLE.



OPERATING INSTRUCTIONS


Inserting hose into valve (Fig. B)
Lift lid on valve. Power unit will automatically come on. Insert hose into valve. Connect desired attachment and you are ready to vacuum.

Changing Bag (Fig. B) To keep your Maxum at top efficiency, change the filter bag at regular intervals. Since cleaning schedules differ, check frequently in the beginning to determine proper interval. To maintain cleanliness, replace filter bag when it is 2/3 to 3/4 full.

To Change the Filter Bag (Fig. B) - Locate canister, lift lid, and pull bag collar off connector. Open new bag, slide collar securely onto inlet connector. (See Fig. B.) Replace with Bag #7767. To reorder, check bag for instructions or contact H-P Products, Inc.

512 West Gorges Street
Louisville, Ohio 44641-0912
330-875-5556

To remove Secondary #4929 Filter & #4928/4934 Filter Supports for Cleaning (Fig. B) Take out bag 7767, pull Support 4934 off connector and out of canister. Take out 4929 & 4928. For reassembly, follow instructions in reverse order. NOTE: 4929 Filter wraps to front of 4928 Filter Support (Fig. B).

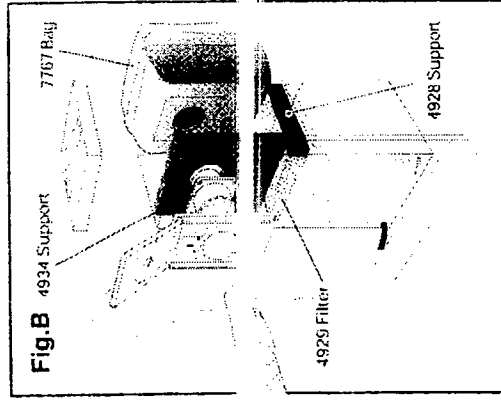

NOTE: This appliance has a THERMAL PROTECTOR built into the motor to prevent overheating. If motor will not operate, it will automatically reset in approximately 1/2 hour.

If motor brushes or bearings are worn out, the circuit protector will trip off again after a short period of time. If this happens, service should be performed by a qualified service representative.

INSTALLATION INSTRUCTIONS

WARNING: This unit must be installed in an accessible area with interior vent (Fig D).

AVERTISSEMENT: Cet unité devrait être installée dans un endroit bien aéré et accessible afin d'éviter la surchauffe de l'appareil.

The Dirt Devil® Maxum can be installed in any one of four configurations. Figures C, D & E illustrate three configurations, with C being the most common. The one not shown is a variation of D.

1. Locate unit centrally so that area to be cleaned can be conveniently reached with standard 20' or 30' hose. Also locate near grounded electrical receptacle for easy plug-in connection of motor cord. Route supply cord so that it doesn't rest against sharp edges or pinch points. See grounding instructions on page 3.

2. All dimensions below are approximate. To determine best configuration for your installation, temporarily install unit for best valve location. Be sure there is clearance to remove top cover and filter bag.

3. Determine valve location and cut 2 1/4" (58mm) wide x 3 3/4" (95mm) high

(Installation continued)