
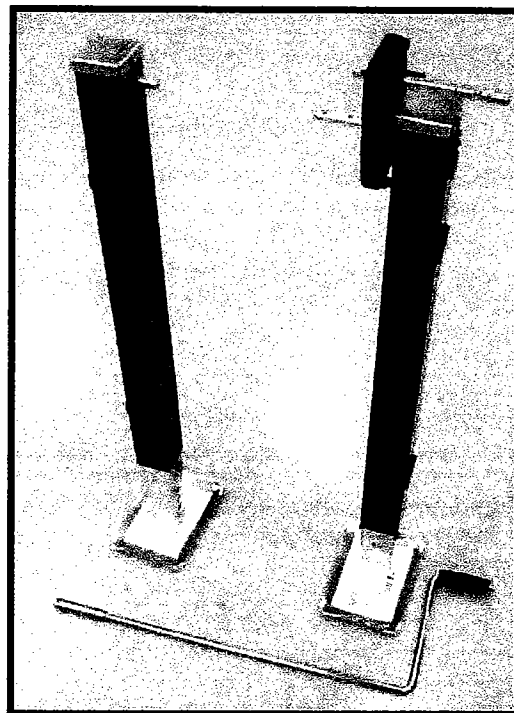


LG65

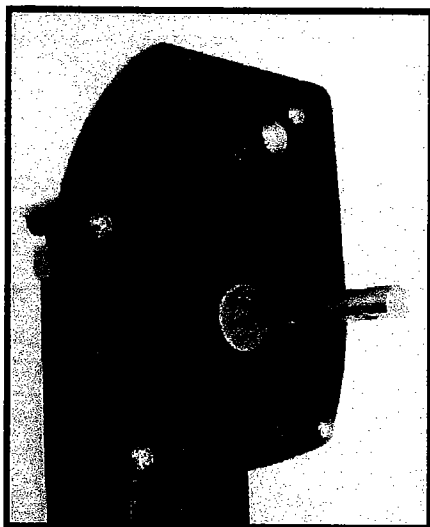

- **6500 lb. capacity per set**
- **Heavy-Duty 6" x 8" footplate provides load support on all surfaces**
- **Total lift capacity of 35", 18" screw travel, 17" drop leg adjustment**
- **Composite gear box with precision alloy drive gears provides smooth torque transfer and added durability**
- **E-coat finish outer tube, zinc plated inner and galvanized drop leg provide excellent corrosion resistance**
- **Heavy-Duty floating support plate aligns gear train under all loading conditions**
- **Manual crank includes Fulton's exclusive comfort grip handle**
- **Optional 12V DC motor kit**

FULTON
Performance Products

FULTON


Performance Products, Inc.

Landing Gear Owners Manual

LG65L 0375 - Landing Gear Jack Left
 LG65R 0375 - Landing Gear Jack Right
 LG65FP0301 - Footplate Assy
 LGGB 0300 - Gearbox Assy
 LGJH 0324 - Handle Assy

The internal gearing and bearings of the jack must be kept lubricated. Remove cap, apply automotive grease to the gears (see Fig. 3). Rotate the jack handle to distribute the grease evenly. A light weight oil must be applied to the input shaft at both sides of the tube.
 (see Fig. 3)

Fig. 3



Rotate the jack handle counter-clockwise to raise, or clockwise to lower the jack.

DROP FOOT OPERATION: Pull the upper hitch pin, lower or raise drop foot to desired position, return the hitch pin making sure it is fully inserted through both the inner tube and the drop foot tube before using the jack.

- Read, understand and follow all instructions before installing and using product. NEVER allow anyone unfamiliar with the operating instructions to use this product.
- Read, understand and follow all instructions provided by the manufacturer of the product(s) that this jack will be installed on. Fulton is not responsible for improper installation, use, or maintenance of this product.
- The footplate must be mounted such that the long part of the footplate is parallel to the length of the trailer.
- When cranking jack or coupling trailer, secure trailer from rolling.
- These jacks are designed for vertical loading. Excessive side forces must be avoided.
- Never adjust the drop foot when the jack is under load.
- Operator use caution never to position any part of your body under any portion of the jack or the load being supported. Never allow anyone or any bodily parts to be positioned on or under the load being supported. Disregard could cause property damage and/or serious bodily injury.
- Never exceed maximum rated capacity. These models have a 3,250# static capacity per jack and a 2,500# lift capacity per jack with a single motor.
- Make certain the hitch pin is fully inserted through both sides of the inner tube and the drop foot tube before using the jack.
- Do not use jacks to lift trailer for servicing or tire changes.
- Retract jacks fully before trailering.
- Failure to follow these warnings and instructions may result in property damage and/or serious bodily injury.

Always replace bent, broken or worn parts before using this product. Use only Fulton Performance Products' parts or parts of equal quality for repair. Replacement parts are available through Fulton Performance Products' Customer Service Department, 715-693-1700. Please specify product model number, name of parts, and part number.

Warranty. Fulton Performance Products, Inc. ("We") warrants to the original consumer purchaser ("You") that the product will be free from defects in material and workmanship for a period of three years under normal use and service, ordinary wear and tear excepted. If the product does not comply with this warranty, We will replace the product without charge to You and within a reasonable time or, at Fulton's option, refund the purchase price. This warranty is not transferable.

Limitations on the Warranty. The warranty does not cover the following: (a) normal wear and tear; (b) damage through abuse, neglect, misuse, or as a result of any accident or in any other manner; (c) damage from misapplication, overloading, or improper installation; (d) improper maintenance; (e) a product altered in any manner by anyone other than us.

Obligations of Purchaser. To make a claim, contact us at 50 Indianhead Drive, Mosinee, WI, (715) 693-1700, identify the product, and follow the instructions that will be provided. Any returned product that is replaced or refunded becomes the property of Fulton. You will be responsible for shipping costs to us. Please retain your purchase receipt to verify date of purchase. This must be produced to honor warranty claim.

Remedy Limits. Repair or replacement is the purchaser's sole remedy under this or any other warranty on the product, whether express or implied. We shall not be liable for service or labor charges incurred in removing or replacing a product or any incidental or consequential damages of any kind. We expressly disclaim any implied warranty of merchantability or fitness for particular purpose after the three-year warranty period. Some states do not allow the exclusion of incidental or consequential damages or limitation of an implied warranty so the above exclusion and limitation may not apply to you.

Legal Rights. This warranty gives you specific legal rights, and You also may have other rights which vary from state to state. **ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON ANY PRODUCT SHALL BE LIMITED TO THREE YEARS FROM THE DATE OF RETAIL PURCHASE BY YOU.** Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to You.




This warranty is governed by the laws of the United States of America and is void where prohibited.

50 Indianhead Dr., P.O. Box 8 Mosinee, WI 54455-0008
 800/604-9466 715/693-1700 Fax 715/693-1799
 www.fultonperformance.com
 fulton@fultonperformance.com

FULTON
 Performance Products, Inc.

F2958

(RE-2958) 05/02

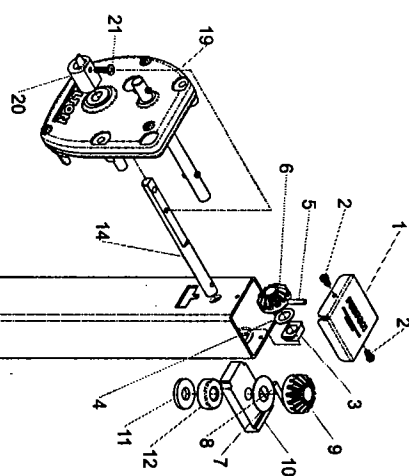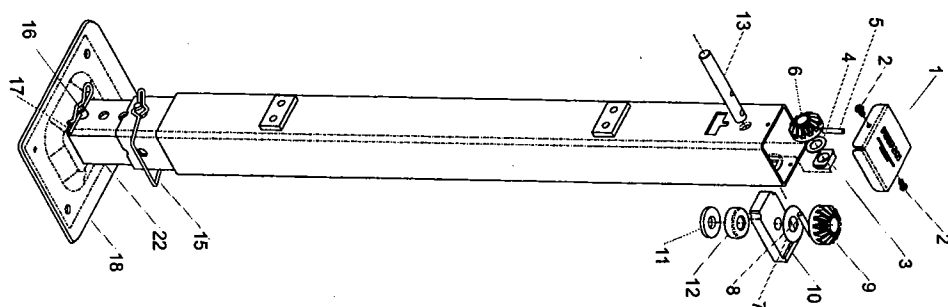

ITEM	DESCRIPTION	QTY.	PART #	REPAIR KIT	KIT DESCRIPTION
1	COVER - 2.50 SQ	(1)	10 308 04	10 308 04	COVER - 2.50 SQ
2	SCREW - 8/32 SELF TAPPING	(2)	09 270 82	09 270 82	SCREW - 8/32 SELF TAPPING
3	BUSHING - FLANGED, .50 ID	(1)	09 320 06	1033313500	GEAR KIT
4	WASHER - THRUST, .50 ID x .03	(1)	6620		
5	GROOVE PIN - 3/16 DIA x	(1)	09 270 52		
6	GEAR 12T UPPER	(1)	09 721 04		
7	WASHER - .63 ID x 1.50 OD	(1)	09 270 44		
8	STRAIGHT PIN - 7/32 x 1.25	(1)	09 270 51		
9	GEAR - 1ST LOWER	(1)	09 721 08		
10	SUPPORT PLATE	(1)	09 341 14	10 341 14	SUPPORT PLATE
11	WASHER - PLAIN .50 ID	(1)	09 270 10	1033312800	BEARING KIT
12	BEARING - THRUST, .50 ID	(1)	8856		
13	INPUT SHAFT - LEFT	(1)	09 331 10	1033313500	INPUT SHAFT KIT - LEFT
3	BUSHING - FLANGED, .50 ID	(1)	09 320 06		
4	WASHER - THRUST, .50 ID x .03	(1)	6620		
5	GROOVE PIN - 3/16 DIA x 1.00	(1)	09 270 52		
14	INPUT SHAFT - RIGHT	(1)	09 331 07	1033314500	INPUT SHAFT KIT - RIGHT
3	BUSHING - FLANGED, .50 ID	(1)	09 320 06		
4	WASHER - THRUST, .50 ID x .03	(1)	6620		
5	GROOVE PIN - 3/16 DIA x	(1)	09 270 52		
15	LNCH PIN	(1)	10 270 33	10 270 33	LNCH PIN
16	CLEVIS PIN	(1)	10 270 38	10 270 38	CLEVIS PIN
17	HITCH CLIP PIN	(1)	08 362 02	08 362 02	HITCH CLIP PIN
18	FOOTPLATE	(1)	09 050 04	09 050 04	FOOTPLATE
19	GEARBOX	(1)	10 340 01	1033315500	GEARBOX KIT - RIGHT
20	STOP	(1)	10 421 03		
21	SCREW - #12-14 TAPPING	(1)	10 270 36		
22	DROP LEG	(1)	09 117 27	09 117 27	DROP LEG
23	HANDLE ASSY	(1)	10 521 12	10 521 12	HANDLE ASSY

