


SECURE EACH BRACKET TO PANEL FRAME  
 USING  $\frac{1}{4}$ " X 1" STAINLESS BOLT &  
 NYLOCK NUT (11-15 FT-LBS)

PANEL TO BE SECURED TO  $\frac{3}{8}$ " ROOF DECK USING  
 #14 X 1  $\frac{1}{2}$ " HEX WASHER HEAD SCREW. 5.2mm  
 LAUAN ROOF DECK REQUIRES BACKER.

(7) MAX: 15A DUPLEX RECEPTS  
 RECEPTS MUST BE IDENTIFIED AS  
 INVERTED/INVERTER PREP OUTLETS  
 ONE OR MORE OF THESE OUTLETS MAY  
 BE GFI PROTECTED

NOTE: BREAKER LOCATION  
 MAY VARY BY MODEL

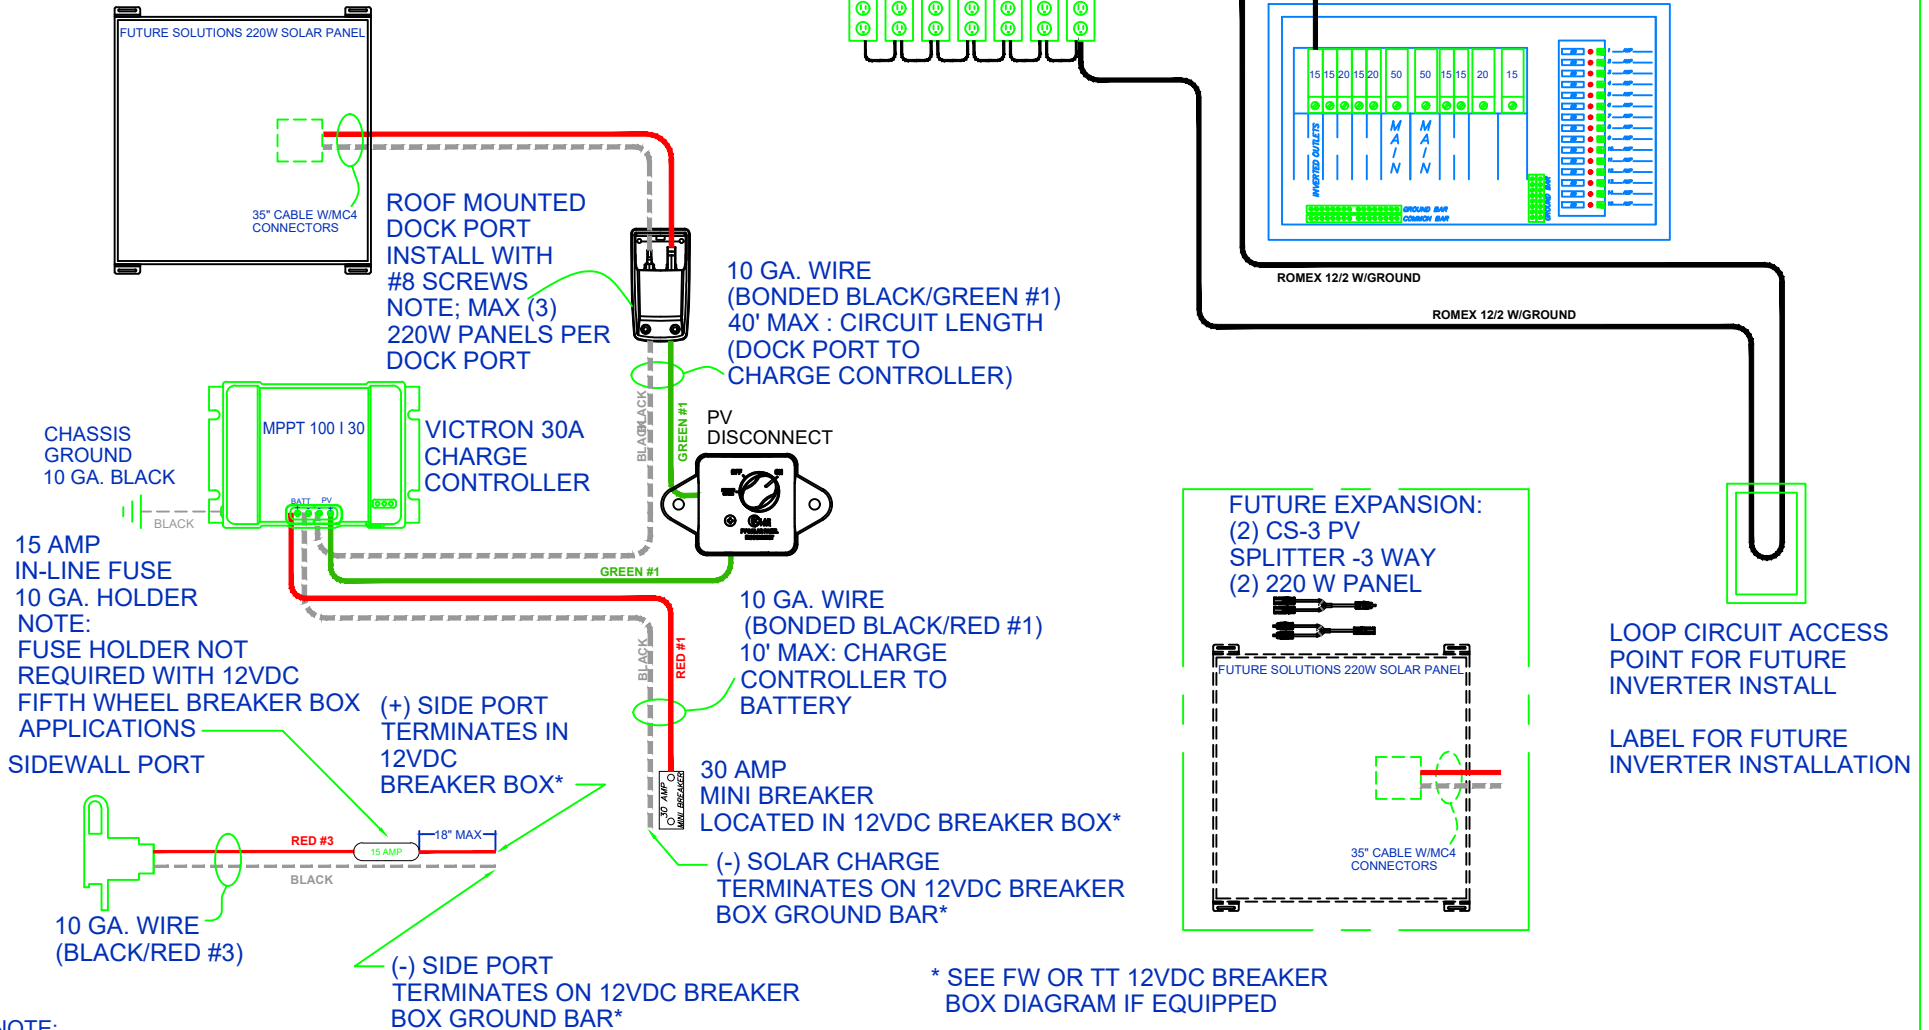

DATE		TITLE	BY	DATE
7/24/23	'24 REVISIONS	SOLARFLEX PROTECT	BAG	06/10/24
11/2/23	ADDED GFI NOTE TO OUTLETS	KEYSTONE RV COMPANY CUSTOMER SERVICE TECHNICAL SUPPORT DRAWING		DWG # CS-0077c